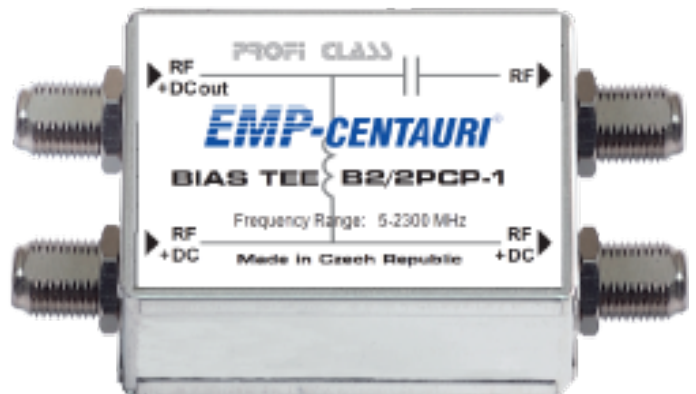


Product summary:

Wideband DC inserter (bias tee)

Brief description:

2in/2out single line DC inserter (bias tee) for both satellite and terrestrial bands, can be used for powering external amplifier. The DC is taken from adjacent through cable.

**Technical data:**

Parameter	Condition	Value
Frequency range		5-2300 MHz
Insertion loss		1 dB avg
DC power		24 V max
DC current pass		2 A max
Dimensions (w,d,h)		7.5 x 4.5 x 2.8 cm
Temperature range		-30 ~ +70 °C
Weight		0.050 kg