


S4/2PCP-W2 (P.166-TW)

Product summary:

Double DiSEqC 2.0 "Position" LNB switch, terr. input

Brief description:

5in/2out double DiSEqC 2.0 switch for 2 satellite positions and 2 subscribers (or 2 tuners), equipped with combiner for terrestrial band. It is designed for switching between 2 Twin LNBS, with using command "Position" (receiver setting A/B). The product allows joining terrestrial band to both downloads.

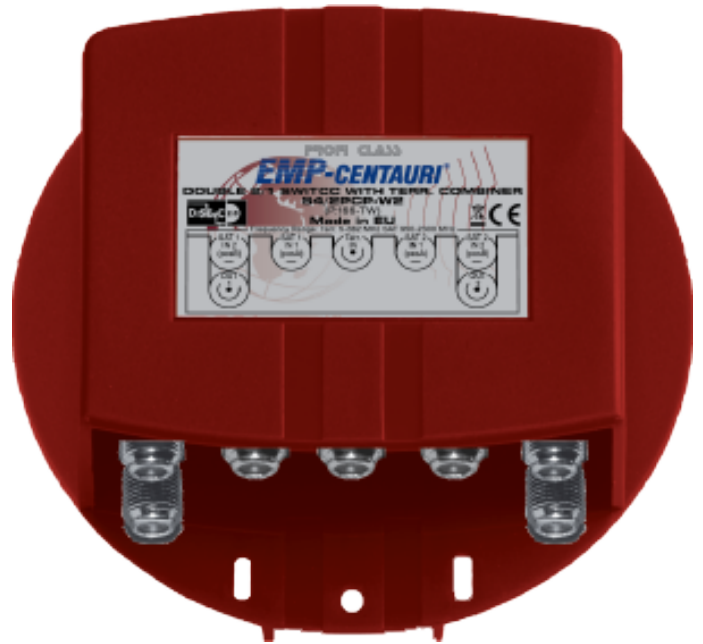

Technical data:

Parameter	Condition	Value
Frequency range	Sat. inputs	950-2300 MHz
	Terr. input	5-862 MHz,
	Output	950-2300 MHz,
Control		DiSEqC 1.0 (2.0) command "Position"
Insertion loss	Sat.	5 dB avg
	Terr.	5 dB avg
Sat. inputs isolation		25 dB min
Power consumption	From each receiver	30 mA (18 V) + LNB
	DC current pass	400 mA max
Dimensions (w,d,h)		11.2 x 11.2 x 4.9 cm
Temperature range		-30 ~ +70°C
Weight		0.290 kg