

A5/5PUC-3 (P.140-M)


Product summary:

Compact amplifier for 4 sat polarities and terrestrial band

Brief description:

5in/5out cascable amplifier high output power for distribution of terrestrial & satellite signals from 1 satellite position (4 polarities).

The amplifier's input-output satellite paths are DC pass-through and supply the appropriate internal amplifiers (a supply voltage of 12 to 18 V DC comes from the satellite input of a multiswitch or power switch connected to the amplifier outputs). If no DC voltage is present at the satellite input or output of the amplifier, the amplifier can be powered from an external 12-20V DC power supply (recommended PA12 power supply) via the power connector. This DC voltage appears at each satellite input and output of the amplifier and can be used to power another unit in cascade or for an LNB.

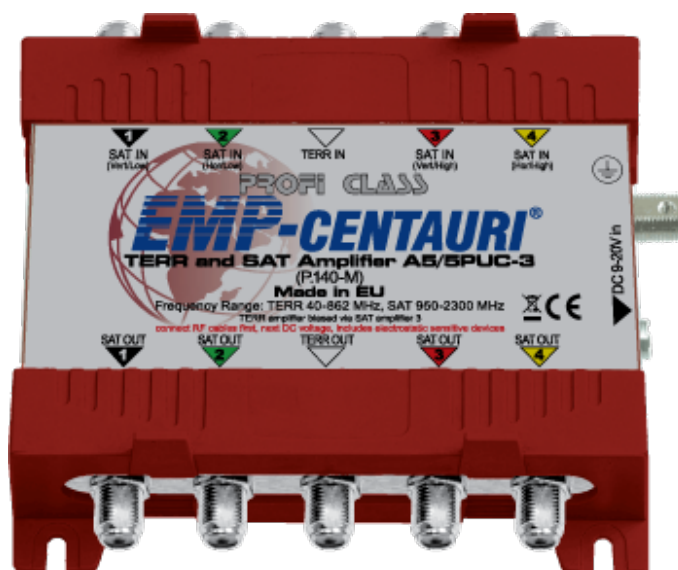

Technical data:

Parameter	Condition	Value
Frequency range	Sat.	950-2300 MHz
	Terr.	40-862 MHz,
Insertion gain	Sat.	13 dB avg
	Terr.	13 dB avg
Isolation between trunks		25 dB avg
Maximum input level*	Sat.	100 dBμV avg
	Terr.	95 dBμV avg,
Maximum output level*	Sat.	113 dBμV avg
	Terr.	108 dBμV avg
Power consumption	Via coaxial cables or DC input	5 x 70 mA (12 V)
Dimensions (w,d,h)		12.7 x 10.4 x 4.1 cm
Temperature range		-30 ~ +70 °C
Weight		0.270 kg

*Terr.: EN 50083-3/60dB IMA3 [dBμV]; SAT: EN 50083-3/35dB IMA3 [dBμV]

Postal address: EMP-Centauri s.r.o. 5. května 690 339 01 Klatovy Czech Republic

Management: Tel.: +420 376 323 813 Tel.: +420 603 497 419 E-mail: info@emp-centauri.cz

Sales department: Tel.: +420 376 323 813 Tel.: +420 603 497 419 Tel.: +420 776 619 976 (EN) Tel.: +420 778 066 654 (CZ) E-mail: sales@emp-centauri.cz

Purchase department: E-mail: purchase@emp-centauri.cz

Technical support: Tel.: +420 376 323 853 (during workhours) Hotline: +420 603 497 419 (available anytime) E-mail:

support@emp-centauri.cz Skype ID : live:.cid.624e3941fb5334d9