


S4/1PCP-W2 (P.164-TW)

Product summary:

DiSEqC 2.0 LNB switch, terr. input

Brief description:

5in/1out DiSEqC 2.0 switch for up to 4 satellite positions and 1 subscriber, equipped with combiner for terrestrial band. It is designed for switching between 3 or 4 LNBs, which are addressed in receiver's menu as DiSEqC 1.0 setting A/B/C/D. The product allows joining terrestrial band to common download.

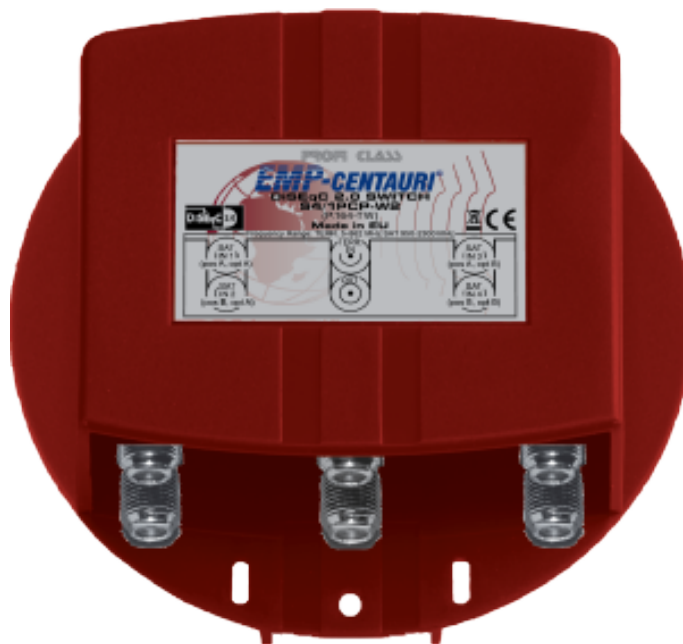

Technical data:

Parameter	Condition	Value
Frequency range	Sat. inputs	950-2300 MHz
	Terr. input	5-862 MHz,
	Output	5-2300 MHz,
Control		DiSEqC 1.0 (2.0) commands
Insertion loss	Sat.	6 dB avg
	Terr.	2 dB avg
Sat. inputs isolation		25 dB min
Current consumption	From receiver	35 mA (18 V)
	DC current pass	400 mA max
Dimensions (w,d,h)		11.2 x 11.2 x 4.9 cm
Temperature range		-30 ~ +70 °C
Weight		0.270 kg