

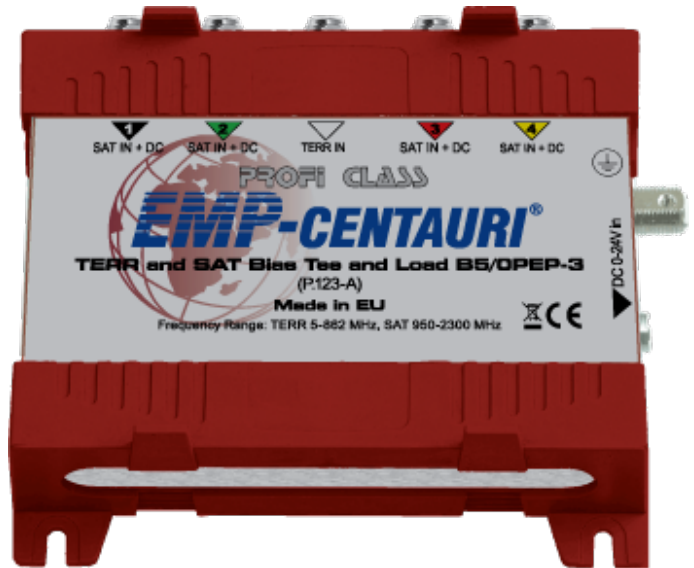
**B5/0PEP-3 (P.123-A)****Product summary:**

Quadruple DC inserters & impedance terminators built into one unit

**Brief description:**

5in/0out DC inserter & impedance terminator. Input voltage from DC2.1 socket is passed to 4 satellite inputs. All inputs (including terrestrial) are terminated by 75 Ohm.

The device is suitable to be connected at the end of a cascade system.

**Technical data:**

| Parameter          | Condition   | Value                |
|--------------------|-------------|----------------------|
| Frequency range    | Sat. inputs | 950-2300 MHz         |
|                    | Terr. input | 5-862 MHz,           |
| Load impedance     |             | 75 Ohm               |
| DC power           |             | 24 V max             |
| Dimensions (w,d,h) |             | 12.7 x 10.4 x 4.1 cm |
| Temperature range  |             | -30 ~ +70 °C         |
| Weight             |             | 0.220 kg             |