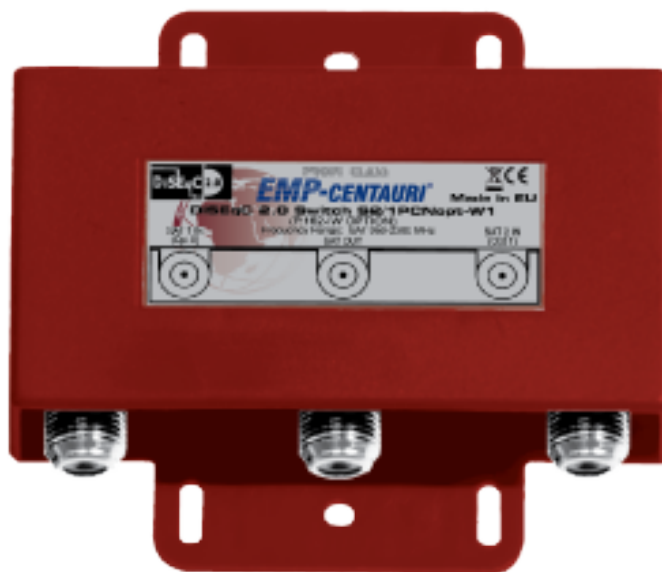


S2/1PCNopt-W1 (P.162-IW Option)**Product summary:**

DiSEqC 2.0 "Option" LNB switch

Brief description:

2in/1out DiSEqC 2.0 switch for 2 satellite positions and 1 subscriber. It is designed especially for switching between monoblock and single LNB with using command "Option" (receiver setting A/C). It may be used, however, also for switching between 2 Monoblock LNBs.

**Technical data:**

Parameter	Condition	Value
Frequency range	Sat. inputs	950-2300 MHz
	Output	950-2300 MHz,
Control	DiSEqC 1.0 (2.0)	command "Option"
Insertion loss		5 dB avg
Sat. inputs isolation		25 dB min
Power consumption	From receiver	30 mA (18 V) + LNB
	DC current pass	400 mA max
Dimensions (w,d,h)		8.2 x 7.7 x 2.3 cm
Temperature range		-30 ~ +70 °C
Weight		0.100 kg