


## S8/1PCP-W2 (P.168-W)

### Product summary:

DiSEqC 1.1&1.2 LNB switch, terr. input

### Brief description:

9in/1out 1.1&1.2 switch for up to 8 satellite positions and 1 subscriber, equipped with combiner for terrestrial band. It is designed for switching between 5 to 8 LNBs. Control mode is configured using built-in DIP switch, see Instruction manual for details. The product allows joining terrestrial band to common download.

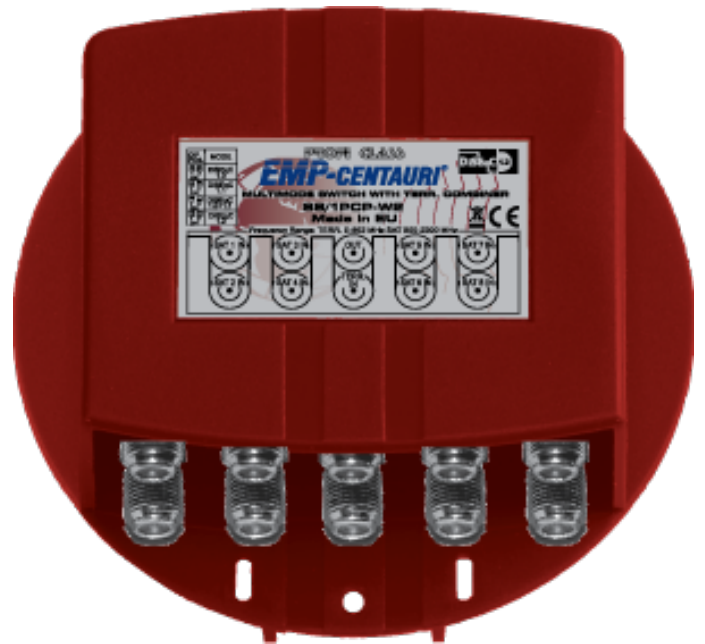

### Technical data:

Parameter	Condition	Value
Frequency range	Sat. inputs	950-2300 MHz
	Terr. input	5-862 MHz,
	Output	5-2300 MHz,
Control		DiSEqC 1.0, 1.1, 1.2 commands
Insertion loss	Sat.	5 dB avg
	Terr.	3 dB avg
Sat. inputs isolation		25 dB min
Power consumption	From receiver	60 mA (18 V) + LNB
	DC current pass	400 mA max
Dimensions (w,d,h)		11.2 x 11.2 x 4.9 cm
Temperature range		-30 ~ +70 °C
Weight		0.300 kg