


## S8/1PCP-W2 (P.168-W)

### Product summary:

DiSEqC 1.1&1.2 LNB switch, terr. input

### Brief description:

9in/1out 1.1&1.2 switch for up to 8 satellite positions and 1 subscriber, equipped with combiner for terrestrial band. It is designed for switching between 5 to 8 LNBs. Control mode is configured using built-in DIP switch, see Instruction manual for details. The product allows joining terrestrial band to common download.

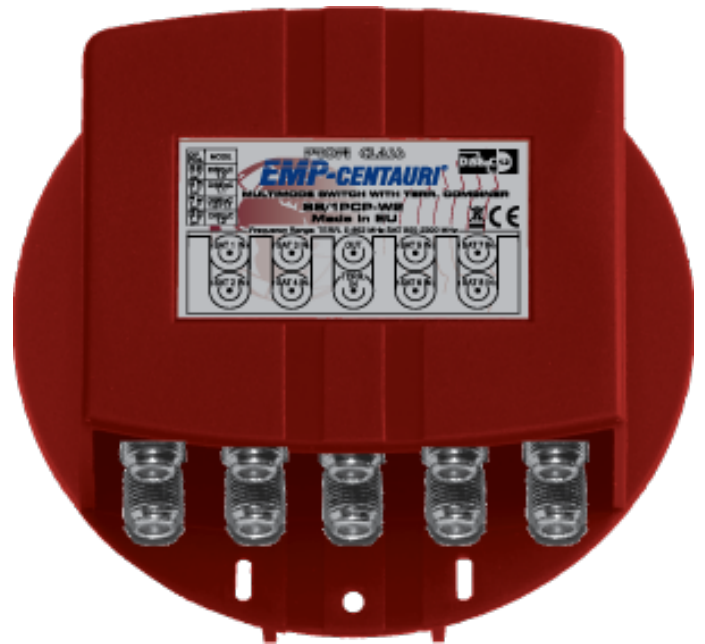

### Technical data:

| Parameter             | Condition       | Value                         |
|-----------------------|-----------------|-------------------------------|
| Frequency range       | Sat. inputs     | 950-2300 MHz                  |
|                       | Terr. input     | 5-862 MHz,                    |
|                       | Output          | 5-2300 MHz,                   |
| Control               |                 | DiSEqC 1.0, 1.1, 1.2 commands |
| Insertion loss        | Sat.            | 5 dB avg                      |
|                       | Terr.           | 3 dB avg                      |
| Sat. inputs isolation |                 | 25 dB min                     |
| Power consumption     | From receiver   | 60 mA (18 V) + LNB            |
|                       | DC current pass | 400 mA max                    |
| Dimensions (w,d,h)    |                 | 11.2 x 11.2 x 4.9 cm          |
| Temperature range     |                 | -30 ~ +70 °C                  |
| Weight                |                 | 0.300 kg                      |